


# CUBEJET



CUBEJET

  
Croatian Creation

  
[www.automarkco.com](http://www.automarkco.com)



AZONPRINTER.COM



## RIGHT SIZE FOR YOUR BUSINESS

Due to Matrix CUBEJET wide range of applications you can choose between 4 standard table sizes. Additionally to our customer satisfaction your printer can be customized in width and height according to your needs.

|                | CUBEJET<br>1206                                | CUBEJET<br>1806  | CUBEJET<br>1211   | CUBEJET<br>2511   |
|----------------|------------------------------------------------|------------------|-------------------|-------------------|
| PRINT AREA     | 590 x 1200<br>mm                               | 590 x 1800<br>mm | 1100 x 1200<br>mm | 1100 x 2500<br>mm |
| HEAD CLEARANCE | 0,5 - 400 mm                                   |                  |                   |                   |
| OBJECT WEIGHT  | 50 kg/m2 (10.2 lb./ft2), non-concentrated load |                  |                   |                   |

# CUBEJET INK

## Azon TurboJet

Azon CUBEJET is fueled with Azon TurboJet Ink.

UV TurboJet inks are specially developed to ensure vivid colors and maximum fastness on almost any material. In case of materials with extremely smooth surface texture, primer is available to make sure that each CUBEJET user can achieve outstanding and satisfying print results.



### EN 71-3 Approved

To increase Matrix UV range of applications TurboJet inks fulfill even the toughest EU regulations and norms. TurboJet is **phthalate free** ink.



### Vivid Colors

Due to specially designed formula TurboJet inks provide vivid color on almost any material. Graphic printed with TurboJet will not fade over time.



### Increased Adhesion

No drying time needed, once printed your product is ready for further processing.



## CONTI System

Each CUBEJET is equipped with CONTI ink system [continues ink supply]. CONTI allows for printer to be refilled with ink during the printing operation which translates to zero time loss during the refill. CUBEJET printers use 6 bulks with capacity of 500 ml each. [White bulks are equipped with on demand ink agitation]



## CUBEJET SERIES INK SYSTEM CONFIGURATION

6x 500ml bulks CMYK + Varnish + White

6x 500ml bulks CMYK + 2x White

[custom configurations are available]

# RIP SOFTWARE

## AZON RIP

With Azon RIP software you are getting absolute control over your CUBEJET printer.  
Even the most complicated and creative ideas are just few clicks away from being printed.


### FROM A SIMPLE TILE TO MOSAIC ART

With individual control of each channel you can define up to 5 layers to create stunning effects on material like a simple tile.

**Varnish Ink Layer**  
shiny finish on top

**Color Ink Layer**  
super realistic colors

**White Ink Layer**  
creating emboss effect



With ink cost calculator you will have precise data about ink cost for each graphic even before print.  
Advanced profiling allows for optimum ink consumption while delivering perfect results.

### ADA BRAILLE PRINT

Predefined settings for printing by ADA Braille standard. [settings can be adjusted according to requested ADA BRAILLE grade ]



### NOZZLE PER CHANNEL






While printing on rotary add on you can regulate number of nozzles used per channel. Nozzles regulation allows for printing on round objects with perfect print results every time .



# FEATURES

## SELECTIVE VACUUM

All printers within Matrix UV series are equipped with vacuum tables. Vacuum tables are separated into zones which can be easily turned on and off depending on size of the material.

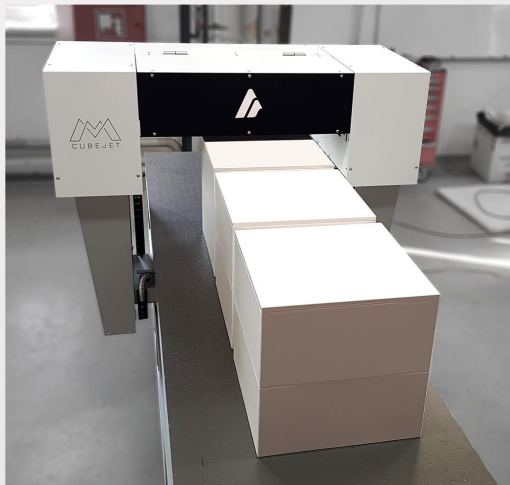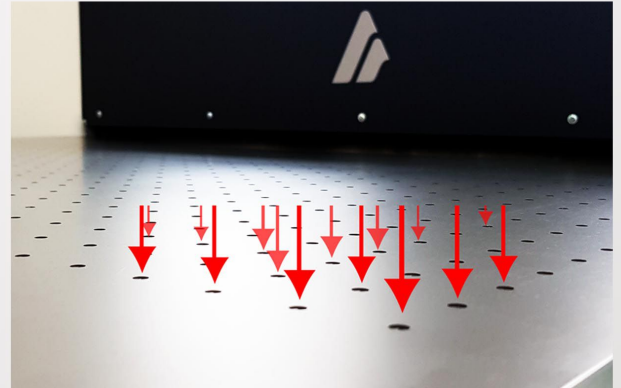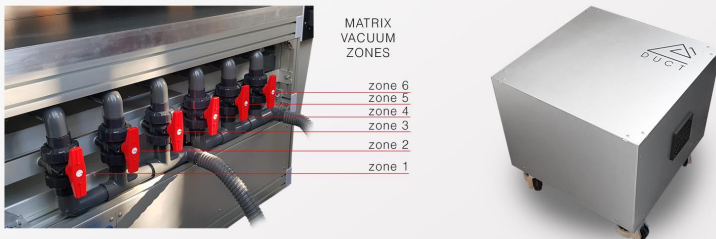


## LOOP MODE

Feature which will enable you to make precision calculation how much time you need to create certain amount of required products. Simply send amount of copy's you need form RIP software to and turn on loop mode. When printer is finished with the first substrate it will move gantry to second one. While second substrate is printed you can safely remove first one and replace it with blank one. When the second substrate is done gantry will go back first one. This will continue until all copy's you send form RIP are printed.

## ROTARY ATTACHMENT

A plug and play add on for every Matrix UV printer. Rotary attachment together with Azon RIP software will make your application spectrum even wider.  
[Max. Diameter 33 cm ]

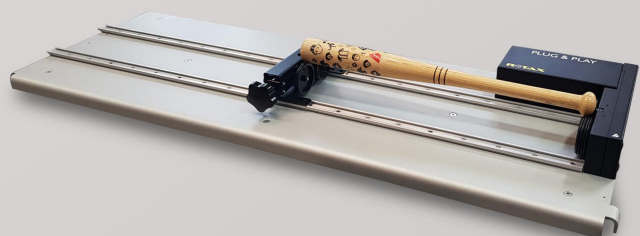

# SPECIFICATIONS

CUBEJET1206 / 1806 / 1211 / 2511

|                                |                                                                                                                                                                                                                                      |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>SUBSTRATE</b>               |                                                                                                                                                                                                                                      |
| PRINT AREA                     | 590 mm x 1200 mm / 590 mm x 1800 mm / 1100 mm x 1200 mm / 1100 mm x 2500 mm<br>23.22" x 47.24" / 23.22" x 70.86" / 43.30" x 47.24" / 43.30" x 98.42"                                                                                 |
| APPCCEPTABLE MEDIA             | 700 mm x 1900 mm / 700 mm x 2500 mm / 1200 mm x 1900 mm / 1200 mm x 3200 mm<br>27.55" x 74.80" / 27.55" x 98.42" / 47.24" x 74.80" / 47.24" x 125.98"                                                                                |
| CLEARANCE                      | 0,5-400 mm / 0,01"- 15.748"                                                                                                                                                                                                          |
| MAX WEIGHT                     | 50 kg/m2 (110.2 lb./ft2),<br>non-concentrated load                                                                                                                                                                                   |
| FIXTURE [VACUUM]               | 3 ZONES TABLE , 1 pump / 6 ZONES TABLE , 2 pumps                                                                                                                                                                                     |
| MATERIAL TYPE                  | WOOD<br>STONE<br>PLASTIC<br>PET, PE, PVC, PP, PS, PLA,<br>PC, PMMA, POM, PA, ABS<br>GLASS<br>CERAMIC<br>METAL                                                                                                                        |
| <b>PRINT</b>                   |                                                                                                                                                                                                                                      |
| PRINT TECHNOLOGY               | Ink-jet[On-demand piezo]                                                                                                                                                                                                             |
| DROP SIZE                      | 3,5 - 21 picolitre                                                                                                                                                                                                                   |
| PRINT RESOLUTION               | 360 dpi<br>720 dpi<br>1080 dpi<br>1440 dpi<br>2880 dpi                                                                                                                                                                               |
| SPEED                          | 3,20 SqM/Hr 34.44SqFt/Hr / 3,66 SqM/Hr 39.39SqFt/Hr                                                                                                                                                                                  |
| ABSOLUTE ACCURACY              | +/- 0.01 (0.3 mm) or +/- 3%<br>from specified print distance                                                                                                                                                                         |
| REPEATABILITY                  | +/- 0.008 (0.2 mm) or +/- 1%<br>from specified print                                                                                                                                                                                 |
| INK CONSUMPTION                | CMYK 9,68 ml/SqM<br>White 2,42 ml/SqM                                                                                                                                                                                                |
| <b>INK</b>                     |                                                                                                                                                                                                                                      |
| TYPE                           | AZON UV TurboJet, certified EN 71-3, Phthalate free                                                                                                                                                                                  |
| CURING                         | ADJUSTABLE UV LED                                                                                                                                                                                                                    |
| COLORS                         | CMYK / WHITE / VARNISH                                                                                                                                                                                                               |
| PRIMER                         | AZON UV CERTIFIED PRIMER                                                                                                                                                                                                             |
| SUPPLY SYSTEM                  | 500ml INK TANKS                                                                                                                                                                                                                      |
| INK CIRCULATION SYSTEM         | White ink circulation using<br>Azon Circulation Technology [ACT]                                                                                                                                                                     |
| <b>SOFTWARE</b>                |                                                                                                                                                                                                                                      |
| RIP                            | AZON RIP 64 bit with ADA Braille translator                                                                                                                                                                                          |
| <b>OPERATIONAL ENVIRONMENT</b> |                                                                                                                                                                                                                                      |
| TEMPERATURE                    | +15°C to 30°C / 59F-86F                                                                                                                                                                                                              |
| HUMIDITY                       | 35-65% RH (non-condensing)                                                                                                                                                                                                           |
| <b>POWER 220V/110V</b>         |                                                                                                                                                                                                                                      |
| STANDBY CONSUMPTION            | 95 W                                                                                                                                                                                                                                 |
| MAX CONSUMPTION                | 2,6 kW / 5 kW                                                                                                                                                                                                                        |
| <b>ASSEMBLED DIMENSIONS</b>    |                                                                                                                                                                                                                                      |
| (WxDxH)                        | 1330 mm x 2300 mm x 1150 mm / 1330 mm x 2900 mm x 1150 mm / 1850 mm x 2300 mm x 1150 mm / 1850 mm x 3600 mm x 1150 mm<br>52.36" x 90.55" x 45.27" / 52.36" x 114.17" x 45.27" / 72.83" x 90.55" x 45.27" / 72.83" x 141.73" x 45.27" |
| WEIGHT                         | 250 kg / 551 lbs / 390 kg / 859 lbs / 270 kg / 595 lbs / 630 kg / 1388 lbs                                                                                                                                                           |



**AUTOMARK**

